

Processes Solar Photovoltaic Systems Cooling Methods (Mini-Review)

¹Ayad Jasim Jabber, ¹Azwan Bin Sapit, ²Mahdi Hatf Kadhum Aboaltabooq and ¹Mas Fawzi Mohd Ali

¹Department of Mechanical Engineering, UTHM University, Selengar, Malaysia

²Al-Furat Al-Awsat Technical University, Al-Furat, Iraq

Abstract: The cells of Photovoltaic PV are very sensitive to temperature variation. The working temperature of the cells is directly increased. Moreover, process warming and electrical applications. The warm execution of solar powered air radiation can be enhanced. Because of its allure, the examination is as yet, going and concentrating on settling the specialized, sparing, natural issues, to accomplish elite and minimal effort of sun-oriented sorption frameworks. Enhancements through exploring geometrical, a configuration of a framework, the parameters of physical aspect and the modes of operation on the execution of solar cell worm sunlight sorption on cooled frameworks are introduced. A study of the most recent configurations, novel increases, new strategies and new approaches are likewise displayed in the present study. A few cases examined in various climatic conditions are compressing. Moreover, PV Cooling boards considered as a basic issue in the outline and task of concentrated Photovoltaic (PV) innovation.

Key words: Cooling boards, natural issues, sparing, sunlight, air radiation, electrical applications

INTRODUCTION

In the study, the progresses in cooling strategies and controlling the temperatures of Photovoltaic (PV) boards as a rule, broke down and examined. To be more specific, it is noticed that an abatement in the board temperature will prompt an expansion in electrical proficiency. However, distinctive cooling procedures have been analysed and thought about (Grubisic-Cabo *et al.*, 2016). The net outcomes increase and irreversible harm to materials of the PV cells. Subsequently, to conquer these impacts and to preserve the working temperature of the PV cells within the specified producer limits, it is fundamental to expel warming from the cells of PV by appropriate strategies of cooling. This survey introduces an outline on uninvolved cooling (fins and warm pipe based), dynamic cooling (by showering water), submersion of fluid cooling method and cooling by utilizing material changing (PCM) in order to improve the execution of the economically accessible PV and Concentrated Photovoltaic CPV cells. Outline on uninvolved cooling (fins and warm pipe based), dynamic cooling (by showering water), submersion of fluid cooling method and cooling by utilizing material changing (PCM) in order to improve the execution of the economically accessible PV and concentrated photovoltaic CPV cells (Sargunanathan *et al.*, 2016). introduced trial and numerical investigations outline on execution of sun oriented photovoltaic cells improvement by utilizing powerful cooling techniques. The test and numerical examination demonstrated that the latent and dynamic cooling systems could decrease the rate of working

temperature increment of sun-oriented cell with time, light power and encompassing temperature and furthermore, keep up the temperature of the solar cell inside the producer at specified value.

MATERIALS AND METHODS

Solar sorption cooling system: Aimed to study sun powered sorption frameworks field. The low execution with high cost were most impediments of resulted advances. In any case, sunlight-based cooling is viewed as appealing because sun-oriented radiation is in stage with the interest in cooling (Bataineh and Taamneh, 2016). Because of its engaging quality, the exploration is yet going and concentrating on settling the technical, prudent, natural issues, to accomplish superior and ease of sun-based sorption frameworks. Changes through examining geometrical, configurations of framework, physical parameters and modes of operational on the execution of sun powered warm sorption cooling frameworks were introduced. A study of the recent configurations, novel increments, new strategies with new techniques are additionally displayed in this survey. A few cases examine in various climatic conditions are condensed. Financial possibility of retention and adsorption frameworks was examined. It can be inferred that cost and vitality powerful sunlight-based sorption frameworks can be created if appropriate mixes of framework segments with working conditions are chosen. Figure 1 and 2 show the configuration of basic system of solar thermal sorption cooling technology.

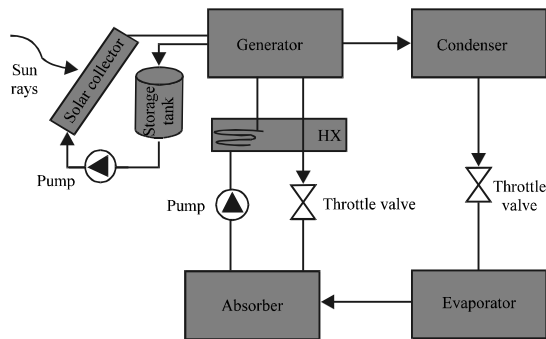


Fig. 1: Configuration of basic system of solar thermal sorption cooling technology (Bataineh and Taamneh, 2016)

Uniform cooling of photovoltaic panels: In their study aimed to provide the art state of solar adsorption systems. Through their overall review of the solar adsorption system, it is concluded that the present technologies exhibited a number of disadvantages such as low performance and high cost. The improvement of the performance of the solar thermal absorption cooling has been done by studying geometry, system configuration, physical parameters and operation modes. This study also describes the investigation of new configurations, new attachments, new technologies and new methods. Summarize several case studies under different climatic conditions. It can be concluded that if an appropriate combination of system components and operating conditions are chosen, a cost-effective and energy-efficient solar adsorption system can be developed. Solar collector's costs made a significant contribution to the total cost of solar adsorption cooling systems. Discovered that the use of dual function systems for thermal energy storage enhanced the feasibility of space cooling systems (Bataineh and Taamneh, 2016).

Floating Tracking of Cooling Concentrating systems (FTCC): These systems consist of a chopine with photovoltaic dialog box which had been supported by polyethylene tubes-social organization. The module stove power ranges from 20-500 kW based on the platform dimensions. Panel cooling was guaranteed by a veil of water obtained by a curing of irrigators placed in the upper side of the panel PV. Figure 3 showed the system plant. Proposed advanced solution in order to exploit open already available andequipped for industrial uses while an improving in the efficiency and yearly yield of PV flora was made in the same time (Cazzaniga *et al.*, 2012). The information supported the theoretical analytic thinking. Particular cooling resulted an acceptable

increase in the efficiency not withstanding data were taken in a rather frigidness period. Reflectors worked in a good manner but the efficiency was slightly less than the predictable by 50-60% in clear sky days compared to the theoretical value of 70-80%. This may be due to the imperfect homogeneity in the reflected radiation. The system of tracking gave some addition in the efficiency about 25% (a report about data is not available in this short reassessment but it agreed with the system of standard vertical axis vertebra trail).

Hybrid solar Photovoltaic-Thermal (PV-T) system cooling by spray of water: Photovoltaic by solar and thermal arrangement of rules were potential drop solutions for present energy requirements. A serious difficulty in the use of photovoltaic organization was a low conversion of energy efficiency of PV cells. Moreover, this efficiency is decreased more when the cells temperature is increased to a level higher than a certain limit point. In the present experimental study, a combination of a PV system cooled by a thin film of water supply with additional system to use the transport of heating plant to the water had been considered. The resulted measurements of experiments for both conventional control board and combined systems indicated that the temperature of the photovoltaic venire for combined system had a smaller value when compared to the conventional control board. Also, since, the heat removal from the PV panel by water film is not lost, the value of overall efficiency of the combined system is greater than that of conventional system as presented in Fig. 4 (Hosseini *et al.*, 2011). One method for improving the organization operations had been done by cover the dialog box surface with thin 16 senses of photographic film which reduces both the temperature and reflection loss of the panel. The film applying of water for cooling photovoltaic panel lowered the reflection loss and temperature of the PV panel which in turn increases the efficiency of electrical of the combined system.

Hybrid Photovoltaic solar-Thermal (PV-T) cooling by powered circulation water: With the goal of adding more efficiency to the PV system, a hybrid Photovoltaic-Thermal (PV-T) system generated electrical and thermal energies simultaneously (Alzaabia *et al.*, 2014; Siecker *et al.*, 2017). The system consisted on thermal collecting pipes of PV module which are mounted to the back part of the PV module as shown in Fig. 5. Rectangular collection pipes are used to improve the tangency field between the PV and the thermal assembling pipes.

When the hybrid system is subjected to a solar radiation, the heat of product is moved to the fluid which

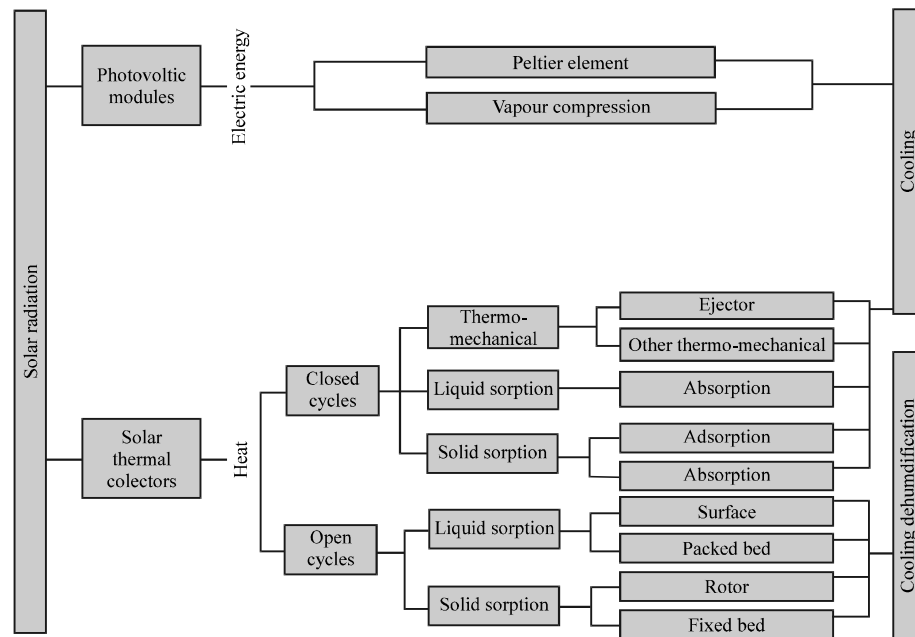


Fig. 2: Solar cooling technology (Bataineh and Taamneh, 2016)

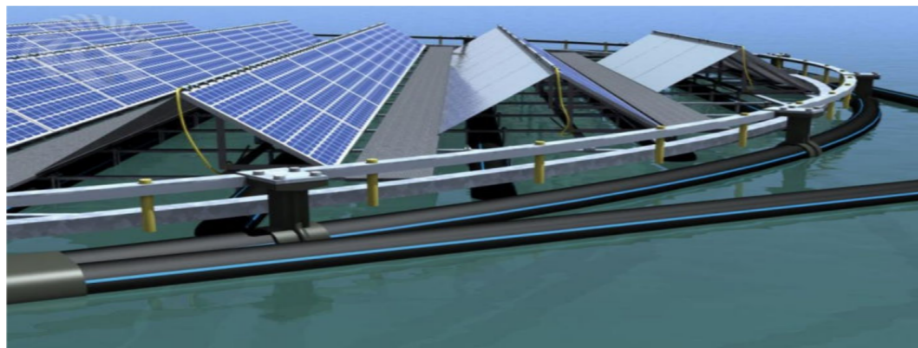


Fig. 3: Outline of an FTCC plant (Cazzaniga *et al.*, 2012)



Fig. 4: Solar photovoltaic panel and water film producer equipped with (Hosseini *et al.*, 2011)

is circulated through thermal collecting pipes. The water which was heated then flows back to the hot water of insulated tank for local or other applications.

Water immersion cooling technique: It's another method could be utilized to decrease PV board temperatures includes actualizing the procedures of water drenching cooling as showed in Fig. 6. With the fluid drenching strategy of cooling framework, a PV intellectual capacity is set in extensive water bodies like waterways, seas, lake, channel and so on. Water was made the inundating fluid which retains the warmth from the PV module and keeps up the surface temperature of the PV module. Consequently, when water retains the warmth from the module of PV the electrical efficiency increments (Mehrotra *et al.*, 2014).



Fig. 5: Hybrid solar Photovoltaic/Thermal (PV-T) cooling by circulation of water (Siecker *et al.*, 2017)

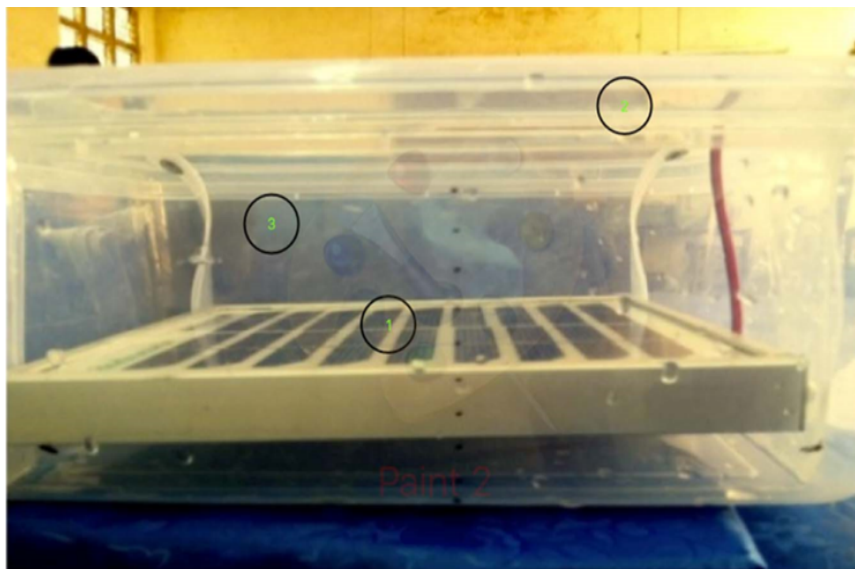


Fig. 6: Water immersion cooling technique applied to PV panel (Mehrotra *et al.*, 2014)

The impact of the economy and the environment the significance of the cooling of the photovoltaic framework was talked about and an exploratory contextual investigation was displayed to analyse the uniform cooling strategy and the non-uniform cooling technique (Bahaidarah *et al.*, 2016). As illustrated by the reduced GPBT, EPBT and LCE, the PV cooling system was created to be environmentally friendly and economically viab.

Water and phase change material based photovoltaic thermal management systems: In this study, a detailed

inspection of different methods in relation to pee based Photovoltaic/Thermal organisation (PV/T) and Photovoltaic Panel with stage Change Material (PV-PCM) systems have been discussed and reported. The present review paper help to create new cooling arrangements, various thermal absorber design and different phase change materials in order to improve the performance of photovoltaic/thermal system. It was concluded from the literature that Photovoltaic Panel with Phase Change Material (PV-PCM) is a very effective solution for photovoltaic panel cooling. However, there are problems.

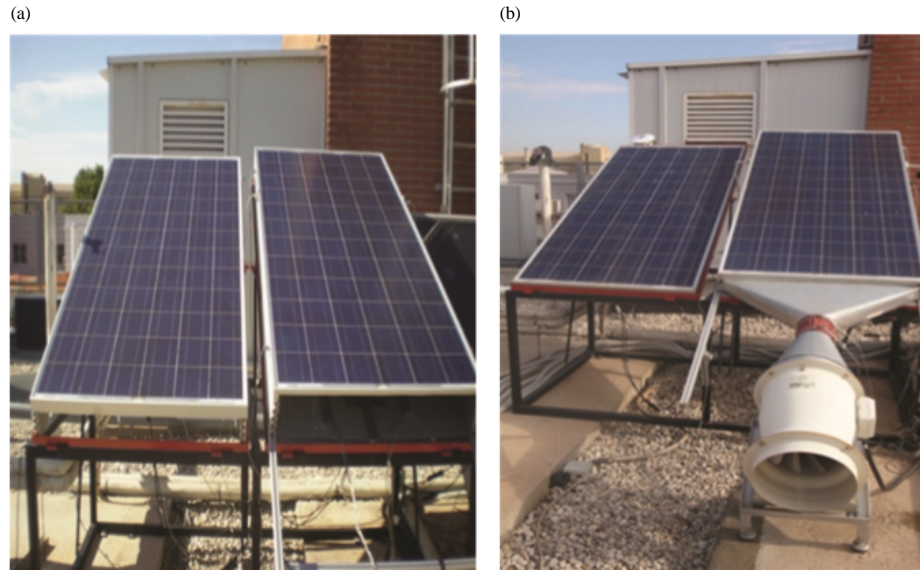


Fig. 7: Solar experimental facility; a) Natural convection configuration and b) Forced connection configuration (Elsheikh *et al.*, 2017)

Associated with phase change material such as low thermal conductivity. Therefore, performance of Photovoltaic Panel with Phase Change Material (PV-PCM) system can be improved through adding heat transfer items within PCM and extracting the heat from PCM to adjust temperature of phase change material. Applications as water heating and space heating can utilize the extracted heat (Preet, 2018). Second layer of photovoltaic board is of Ethylene and Vinyl Acetic acid derivation (EVA) which have the materials properties and a good clarity, gloss, low temperature strength, low warm development coefficient, stretch split protection and hot-dissolve glue waterproof properties and give protection from UV radiation (Sadok and Mehdaoui, 2008; Hernandez *et al.*, 2013) manufactured a photovoltaic/thermal system in which the absorption plate had an area of 2.97 m^2 ($2.48 \times 1.2 \text{ m}$) and was divided into four channels, each one has the dimensions (2.48 m long and 0.14 m wide). Solar isolation. The collector is made of 102 monocrystalline silicon solar cells that cover 43% of the absorber area. Using a thermosiphon flow system and a hybrid.

Forced air stream: Said that the principle need in Photovoltaic (PV) boards is the generation of power. The change of sun-based vitality into power relies upon the working temperature such that the execution increments with the diminishing temperatures. In the current writing, diverse cooling methods can be found. The motivation behind the greater part is utilized air or water warm vitality transporters (Hernandez *et al.*, 2013). The consequences of the tests done on two indistinguishable sun-based

boards are incorporated. One of them has been changed and mounted on various channels through which wind streams.

The diverse examinations led demonstrate the impacts of the air channel cross-segment. The diverse examinations led demonstrate the impacts of the air channel cross-segment, the airspeed and the board temperature on the electrical parameters of the sunlight-based boards, for example, the voltage, current, power and execution. The outcomes infer that the air space between the photovoltaic boards and a steel rooftop must be sufficiently high to enable the board to be cooled and thusly to accomplish higher effectiveness. This panel was also tested using limited convection using a fan that was connected using a nozzle (Fig. 7).

Numerous sun oriented based warm frameworks are utilized for producing power, water desalination, structures aerating and cooling and water warming from sun oriented radiation (Elsheikh *et al.*, 2017).

Solar photovoltaic tracking systems: The tracking system tracks and follows the position of the sun, consequently expanding the contribution of sun-based radiation and electrical vitality yield (Iqdour and Zeroual, 2017; Al-Rousan *et al.*, 2012). In any case, outlining, actualizing and introducing these frameworks are considered hard for a variety of reasons. The various measure of estimation comes about should be available before utilizing tracker frameworks (Birol, 2006; Jazayeri *et al.*, 2013; Smith, 2012). The collected outcomes amid a long period of time to be used when the sun-based cells are installed to track the

sun (Kim *et al.*, 2006). The gathered outcomes are utilized to distinguish the best procedure for following the place of the sun. The process of locating the sun is made to acquire the optimal yield of sunlight-based vitality in all circumstances may affect yield electrical power (Almonacid *et al.*, 2017; Marlein and Burgelman, 2007). Oriented solar photovoltaic modules at an angle that produces the best power yield. Planning a sun-based following solar photovoltaic modules in the movement of the sun over the sky to catch the most extreme measure of daylight.

Nonetheless, it requires broad numerical computations and nitty gritty estimations of different sun powered parameters. A standout amongst the most imperative parameters is the day by day normal sun-based irradiance. The day by day normal sun-oriented irradiance ranges from 4-7 kWh/m² overall (John and William, 2013). Solar time are the basic parameter sin the solar energy field. Green which time is a timescale that relies upon the revolution of the earth around itself in one day (Goswami *et al.*, 2000; Kreith and Kreider, 1978; Makhloufi *et al.*, 2014). This time can be resolved in view of the meridian that goes through the town of Greenwich in Britain which is one of the longitudes that was received as a source of perspective point for world planning.

RESULTS AND DISCUSSION

Photovoltaic cells permit a direct conversion of photovoltaic power into electrical with most efficiency at around (9-12%), depending on photovoltaic. More than 80% of the photovoltaic radiation attaining the

photovoltaic is not transformed into electricity. The excessive temperature has a poor impact on the PV panels. Therefore, electricity output of a PV panel rely on the operating temperature, minimize so their conversion efficiency with the aid (0.4-0.5%) per degree upward thrust in temperature (Brinkworth *et al.*, 1997). So, the working temperature assumes the part of photovoltaic transformation process (Hu and White, 1983). This reverse relationship of yield control change proficiency with temperature is mostly. Therefore, examined diverse cooling methods in PV panels (Tonui and Tripanagnostopoulos, 2008). Most of them depend on the utilization of an energy carrier (Hernandez *et al.*, 2013). The detrimental impact of temperature growth at the overall performance of the panel is a vital component. The problem of excessive temperature and reduced because of the truth that space between both surfaces (the PV panels and the plastic roof) is smaller and consequently there is less cooling effect through herbal convection. Impact the temperature on the overall performance has been explained by testing distinctive cooling designs common and constrained convection utilizing a fan, this research portrays the establishment worked. In the Universidad Politecnica study the use of air as a cooling system to reduce the temperature of PV panels and enhance efficiency. The devices used as part of the investigation have shown that the vulnerability associated with the estimates has been assessed (Table 1). The results were obtained for both normal and restricted pregnancies. Three unique estimates of the dispersal of aerobic channels were considered. Moreover, the primary need for Photovoltaic (PV) is power generation. This research

Table 1: Highlights of selected studies on cooling of PV modules in terms of technology

Definition of authors	Highlighted	Results that appeared	Technology
Parel <i>et al.</i> (2015)	Show the light at an angular	Used to enhance efficiency	FTCC
Wu <i>et al.</i> (2016)	Stay away from the edge of the solar condenser	Used the 3D on technology increases the output power	FTCC
Rabl (1976)	Solar concentrators, light, low cost and generate electricity	For high thermal applications	FTCC
Correia <i>et al.</i> (2015)	Acceptance angle, sensitivity to errors, reflector and reflections concentrators were evaluated	Thermal efficiency on the pipes was 52.8 and 51.5%, respectively	Hybrid PV/T
Hu <i>et al.</i> (2016)	Wickless pipe compared with a wire-meshed pipe	Cost and negligibility absorption and losses validated	FTCC
Jouhara <i>et al.</i> (2017)	Experiments on hybrid PV/T systems to analyses hot water	Results supply 60% hot water needs on cloudy days and 100% on sunny days	Hybrid PV/T
Ntsaluba <i>et al.</i> (2015)	Model developed to maximize by optimizing flow rate	7.82% increased energy, thermal efficiency decreased between 5.54 and 7.34% using connecting pipes	Hybrid PV/T
Tang <i>et al.</i> (2010)	Micro-heat-pipes used for PV panel cooling by use of evaporator and condenser	Experiments show air cooling electrical efficiency 2.6% and water cooling 3%	Hybrid PV/T
Sotehi <i>et al.</i> (2016)	Hybrid PV/T solar collector for net zero energy buildings proposed	Results solar electricity is covers hot water needs, air conditioning, lighting and household appliances	Hybrid PV/T
Aste <i>et al.</i> (2015)	Water glazed PV/T system, roll-bond flat plate absorber	Developed to the performance of PV/T collectors, results enhancements in electrical efficiency	Hybrid PV/T
Kroib <i>et al.</i> (2014)	Hybrid PV/T solar collector and applied to desalination plant	Using seawater to cool, results in increased electrical efficiency	Hybrid PV/T
Rosa-Clot <i>et al.</i> (2010)	Performance of PV panel evaluated at different submersion depths	The 3-D model developed results cooling keeps PV cells at low temperature, improving electrical efficiency	PV panel with water immersion cooling
Han <i>et al.</i> (2011)	(DI) water, (IPA), ethyl acetate and dimethyl silicone oil was chosen	Temperature controllable from 20-31°C at 920 W/m ² irradiance and Reynolds number varying between 13,602 and 2720	PV panel with water immersion cooling
Han <i>et al.</i> (2011)		Performance of two structural models at axial and lateral agreement with simulations	PV panel with water immersion cooling
Sun <i>et al.</i> (2014)	Where dimethyl silicon oil is used as immersing fluid		

revolves around the use of air as a working fluid developed either by normal convection or restricted by the means of the fan. The aim of this research is to describe the electrical behavior of photovoltaic panels placed in surface applications that ensure low working temperatures which in turn change the effects on the effectiveness of high temperature. Various directed investigations show air effects across the air area, air velocity and plate temperature on electrical parameters of solar panels, for example, voltage, current, energy and performance. The reason for this is that the space between PV panels and steel surfaces must be high enough to enable plate cooling and thus, achieve higher efficiency (Elsheikh *et al.*, 2017).

CONCLUSION

Although, there are a few audits in different design applications, the current study reviews the current patterns of uses of dynamic solar-powered tires, for example, sun-based cells and desalination. From our audit point of view, the following concluding comments can be collected. The hot absorbance and conductivity of nanomaterials are the most critical variables that affect the warm execution of solar powered frames. The high cost and hardness of nanomaterial production are key factors impeding its use in modern business and applications. More virtual testing is needed to understand the tools to improve nano thermal exchange in different solar-based frames. The thermal properties of the high majority of the warm exchange process are greatly enhanced, thus, reducing the volume of solar powered instruments. More hypothetical examinations are required to comprehend the instruments of the warmth exchange upgrade in various sunlight-based frameworks. The predominant thermo-physical properties of upgrades the warmth exchange process significantly which thusly bring about lessening the extent of the sun powered gadgets. Utilization in business and modern applications.

REFERENCES

- Al-Rousan, M., A. Shareiah, N. AL-Rousan and H. AL-Najjar, 2012. Choosing the efficient tracking method for real time tracking system in Jordan and it's neighbors to get maximum gained power based on experimental data. Proceedings of the 2012 International Conference on Renewable Energy Research and Applications (ICRERA'12), November 11-14, 2012, IEEE, Nagasaki, Japan, ISBN:978-1-4673-2328-4, pp: 1-6.
- Almonacid, F., E.F. Fernandez, A. Mellit and S. Kalogirou, 2017. Review of techniques based on artificial neural networks for the electrical characterization of concentrator photovoltaic technology. *Renewable Sustainable Energy Rev.*, 75: 938-953.
- Alzaabia, A.A., N.K. Badawiyeha, H.O. Hantousha and A.K. Hamid, 2014. Electrical/thermal performance of hybrid PV/T system in Sharjah, UAE. *Intl. J. Smart Grid Clean Energy*, 3: 385-389.
- Aste, N., F. Leonforte and C. Del Pero, 2015. Design, modeling and performance monitoring of a photovoltaic-thermal (PVT) water collector. *Solar Energy*, 112: 85-99.
- Bahaidarah, H.M., A.A. Baloch and P. Gandhidasan, 2016. Uniform cooling of photovoltaic panels: A review. *Renewable Sustainable Energy Rev.*, 57: 1520-1544.
- Bataineh, K. and Y. Taamneh, 2016. Review and recent improvements of solar sorption cooling systems. *Energy Build.*, 128: 22-37.
- Birol, F., 2006. World energy prospects and challenges. *Aust. Econ. Rev.*, 39: 190-195.
- Brinkworth, B.J., B.M. Cross, R.H. Marshall and H. Yang, 1997. Thermal regulation of photovoltaic cladding. *Solar Energy*, 61: 169-178.
- Cazzaniga, R., M. Rosa-Clot, P. Rosa-Clot and G.M. Tina, 2012. Floating Tracking Cooling Concentrating (FTCC) systems. Proceedings of the 38th IEEE Conference on Photovoltaic Specialists (PVSC'12), June 3-8, 2012, IEEE, Austin, Texas, USA., ISBN:978-1-4673-0064-3, pp: 000514-000519.
- Correia, S.F., P.P. Lima, P.S. Andre, M.R.S. Ferreira and L.A.D. Carlos, 2015. High-efficiency luminescent solar concentrators for flexible waveguiding photovoltaics. *Solar Energy Mater. Cells*, 138: 51-57.
- Elsheikh, A.H., S.W. Sharshir, M.E. Mostafa, F.A. Essa and M.K.A. Ali, 2017. Applications of nanofluids in solar energy: A review of recent advances. *Renewable Sustainable Energy Rev.*, 82: 3483-3502.
- Goswami, D.Y., F. Kreith and J.F. Kreider, 2000. Principles of Solar Engineering. 2nd Edn., Taylor & Francis, Abingdon, England, UK.,.
- Grubisic-Cabo, F., S. Nizetic and T.G. Marco, 2016. Photovoltaic panels: A review of the cooling techniques. *Trans. Famena*, 40: 63-74.
- Han, X., Y. Wang and L. Zhu, 2011. Electrical and thermal performance of silicon concentrator solar cells immersed in dielectric liquids. *Appl. Energy*, 88: 4481-4489.
- Hernandez, M.R., G.J.R. Cascales, V.F. Garcia, A.S. Kaiser and B. Zamora, 2013. Improving the electrical parameters of a photovoltaic panel by means of an induced or forced air stream. *Int. J. Photoenergy*, 2013: 1-10.

- Hosseini, R., N. Hosseini and H. Khorasanizadeh, 2011. An experimental study of combining a photovoltaic system with a heating system. Proceedings of the 2011 Conference on World Renewable Energy Congress-Sweden, May 8-13, 2011, Linköping University, Linköping, Sweden, ISBN:978-91-7393-070-3, pp: 2993-3000.
- Hu, C. and R.M. White, 1983. Solar Cells: From Basics to Advanced Systems. McGraw-Hill Education, New York, USA., Pages: 294.
- Hu, M., R. Zheng, G. Pei, Y. Wang and J. Li *et al.*, 2016. Experimental study of the effect of inclination angle on the thermal performance of heat pipe Photovoltaic/Thermal (PV/T) systems with wickless heat pipe and wire-meshed heat pipe. Appl. Therm. Eng., 106: 651-660.
- Iqdour, R. and A. Zeroual, 2017. Prediction of daily global solar radiation using fuzzy systems. Intl. J. Sustainable Energy, 26: 19-29.
- Jazayeri, K., S. Uysal and M. Jazayeri, 2013. MATLAB/Simulink based simulation of solar incidence angle and the sun's position in the sky with respect to observation points on the Earth. Proceedings of the 2013 International Conference on Renewable Energy Research and Applications (ICRERA'13), October 20-23, 2013, IEEE, Madrid, Spain, ISBN:978-1-4799-1464-7, pp: 173-177.
- John, A.D. and A.B. William, 2013. Solar Engineering of Thermal Processes. John Wiley & Sons, Hoboken, New Jersey, ISBN:978-1-118-43348-5, Pages: 910.
- Jouhara, H., M. Szulgowska-Zgrzywa, M.A. Sayegh, J. Milko and J. Danielewicz *et al.*, 2017. The performance of a heat pipe based solar PV/T roof collector and its potential contribution in district heating applications. Energy, 136: 117-125.
- Kim, Y., S. Cook, S.M. Tuladhar, S.A. Choulis and J. Nelson *et al.*, 2006. A strong regioregularity effect in self-organizing conjugated polymer films and high-efficiency polythiophene: fullerene solar cells. Nature Mater., 5: 197-203.
- Kreith, F. and J.F. Kreider, 1978. Principles of Solar Engineering. Hemisphere Publishing, Washington, D.C., USA., ISBN:9780070354760, Pages: 778.
- Kroib, A., A. Prabst, S. Hamberger, M. Spinnler and Y. Tripanagnostopoulos *et al.*, 2014. Development of a seawater-proof hybrid Photovoltaic/Thermal (PV/T) solar collector. Energy Procedia, 52: 93-103.
- Makhloufi, M.T., M.S. Khireddine, Y. Abdessemed and A. Boutarfa, 2014. Tracking power photovoltaic system using artificial neural network control strategy. Intl. J. Intell. Syst. Appl., 6: 17-26.
- Marlein, J. and M. Burgelman, 2007. Empirical JV modelling of CIGS solar cells. Proceedings of the 2007 NUMOS International Workshop on Numerical Modelling of Thin Film Solar Cells, March 28-30, 2007, Ghent University, Ghent, Belgium, pp: 227-233.
- Mehrotra, S., P. Rawat, M. Debbarma and K. Sudhakar, 2014. Performance of a solar panel with water immersion cooling technique. Int. J. Sci. Environ. Technol., 3: 1161-1172.
- Ntsaluba, S., B. Zhu and X. Xia, 2015. Optimal flow control of a forced circulation solar water heating system with energy storage units and connecting pipes. Renew Energy, 89: 108-124.
- Parel, T.S., C. Pistolas, L. Danos and T. Markvart, 2015. Modelling and experimental analysis of the angular distribution of the emitted light from the edge of luminescent solar concentrators. Opt. Mater., 42: 532-537.
- Preet, S., 2018. Water and phase change material based photovoltaic thermal management systems: A review. Renewable Sustainable Energy Rev., 82: 791-807.
- Rabl, A., 1976. Comparison of solar concentrators. Solar Energy, 18: 93-111.
- Rosa-Clot, M., P. Rosa-Clot, G.M. Tina and P.F. Scandura, 2010. Submerged photovoltaic solar panel: SP2. Renewable Energy, 35: 1862-1865.
- Sadok, M. and A. Mehdaoui, 2008. Outdoor testing of photovoltaic arrays in the Saharan region. Renewable Energy, 33: 2516-2524.
- Sargunanathan, S., A. Elango and S.T. Mohideen, 2016. Performance enhancement of solar photovoltaic cells using effective cooling methods: A review. Renewable Sustainable Energy Rev., 64: 382-393.
- Siecker, J., K. Kusakana and B.P. Numbi, 2017. A review of solar photovoltaic systems cooling technologies. Renewable Sustainable Energy Rev., 79: 192-203.
- Smith, C.L., 2012. The energy challenge. Appl. Petrochem. Res., 2: 3-6.
- Sotehi, O., A. Chaker and C. Maalouf, 2016. Hybrid PV/T water solar collector for net zero energy building and fresh water production: A theoretical approach. Desalin., 385: 1-11.
- Sun, Y., Y. Wang, L. Zhu, B. Yin and H. Xiang *et al.*, 2014. Direct liquid-immersion cooling of concentrator silicon solar cells in a linear concentrating photovoltaic receiver. Energy, 65: 264-271.
- Tang, X., Z. Quan and Y. Zhao, 2010. Experimental investigation of solar panel cooling by a novel micro heat pipe array. Energy Power Eng., 2: 171-174.
- Tonui, J.K. and Y. Tripanagnostopoulos, 2008. Performance improvement of PV/T solar collectors with natural air flow operation. Solar Energy, 82: 1-12.
- Wu, Y., K. Connelly, Y. Liu, X. Gu and Y. Gao *et al.*, 2016. Smart solar concentrators for building integrated photovoltaic facades. Solar Energy, 133: 111-118.