

Study on Structural Behavior of Coal Ash and M-Sand in Concrete

Bhagwant Singh Sidhu

Department of Harbour and Ocean Engineering, AMET University,
Chennai, India

Abstract: Concrete is one of the important construction material used in the world of all engineering works including the infrastructure development proved that, it is a cheap material and its constituents are widely available in nature. Due to wide spread usage and fast infrastructure development in all over the world, there is shortage of cements. In this study, cement will replaced by coal ash and M-sand powder accordingly in the range of 0, 5, 10 and 15% in M-25 grade concrete.

Key words: Concrete, important, material, coal ash, sand powder, India

INTRODUCTION

The recyclability of coal ash powder and M-sand as a pozzolana as partial replacement of cement in the concrete (Saiyad *et al.*, 2016). The strength of coal ash powder and M-sand concrete and conventional concrete. The comparative study (Subramani and Ramesh, 2015) of coal ash powder and M-sand concrete and conventional concrete strength. The scope of the study is to cast the concrete specimens and conduct the compressive strength test, split tensile strength test and flexural strength test at 7, 14 and 28th days with the specified percentage *Chryseobacterium* sp. of coal ash powder and M-sand then compare it with the controlled concrete specimens. In this project, M25 concrete is designed for various combinations (Fig. 1).

The main objective of this study is to study the chemical composition of the coal ash and M-sand to find its suitability of replacement in the concrete. Examine the feasibility of utilizing the coal ash and M-sand as cement replacement material. The strength parameters of the coal ash and M-sand mixed specimen and to compare it with conventional specimens.

In this study also reviewed in, Synthesis, growth, spectral, optical and thermal studies of Thiourea family crystal: TTPB (Subashini *et al.*, 2017). Investigations on dielectric and impedance properties of M-type hexaferrite (Mangai *et al.*, 2016). A study of optical, surface morphological and electrical properties of manganese oxide nanoparticles (Vijayamari *et al.*, 2016) (Fig. 2).



Fig. 1: Coal ash



Fig. 2: M-sand

MATERIALS AND METHODS

The different diaries were gathered and considered on the incomplete substitution of the concrete by various materials. As indicated by these diaries the

Table 1: Test results cubes for compressive strength

Number of curing days	Average compressive strength (N/mm ²)			
	Plain concrete	Coal ash powder and M-sand concrete (%)		
		5	10	15
7	20.54	23.27	24.68	27.03
14	24.87	25.39	28.23	32.79
28	31.16	40.76	44.74	44.95

Table 2: Test results beam for flexural strength

Number of curing days	Average flexural strength (N/mm ²)			
	Plain concrete	Coal ash and M-sand concrete (%)		
		5	10	15
7	3.64	2.78	2.58	3.50
14	4.82	3.29	4.23	4.25
28	5.68	5.16	6.35	6.96

procedure of the examination and the strategy for the experimentation and the distinctive tests led in those diaries were contemplated and learned. On the premise of the investigations of the diaries gathered for the trial the exploratory technique for the venture was pick.

As indicated by the strategy taken after for the venture, the materials were gathered for the trial, the preparatory tests were directed to the materials to know the properties for example, particular gravity, fineness modulus and the water ingestion. In view of these properties the plan blend was done to know the amount of the materials required for the M25 grade concrete.

The examples with the three distinct rates of the incomplete substitution of bond by coalash powder and M-sand for example, 5, 10 and 15% alongside the control examples. The compressive, split and flexural qualities of the examples were tested.

RESULTS AND DISCUSSION

The mix design was made for the M25 grade concrete with partial replacement of cement by coal ash powder and M-sand with various percentages. The specimens were casted and tested. The maximum flexural strength for partial replacement of cement with coal sand and M-sand be achieved by 15% is found to be greater than the conventional concrete. It achieved maximum compressive strength when there is partial replacement of cement with coal ash and M-sand (15%). So, the optimum percentage of replacement of coal ash and M-sand is 15% (Table 1 and 2) (Fig. 3 and 4).

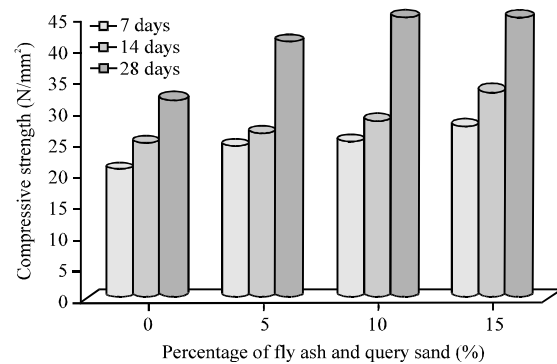


Fig. 3: Compressive strength of cubes

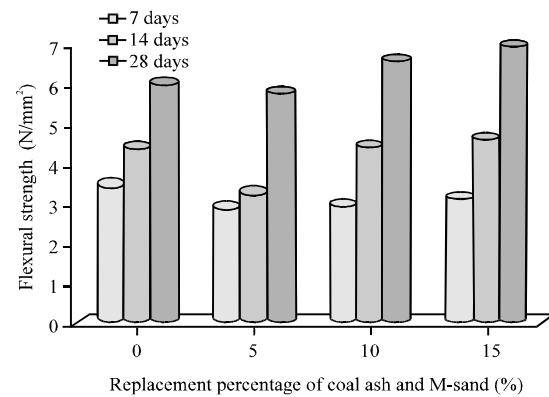


Fig. 4: Flexural strength of beams

CONCLUSION

One of the approaches to enhancing manageability is to diminish the human utilization of normal assets. With a specific end goal to ensure the common assets, for example, waterway sand, this investigation has recognized quarry clean which is a waste item from stone smashing industry and accessible free-of-cost as incomplete trade for stream sand. In view of this test examination, it is discovered that quarry clean can be utilized as an option material to the normal stream sand and can be presented as an utilitarian development material. The physical and concoction properties of quarry tidy fulfill the prerequisites of fine total. The examination recommends that stone tidy is very proper to be chosen as the substitution of fine total. Quarry clean can possibly give other option to fine total in this way limiting waste items and transfer issues related with it. The main real constraint is the decline in workability which can be overwhelmed by the utilization of fly slag or compound admixtures, for example, superplasticizers which give high workability at a similar water substance.

REFERENCES

- Mangai, K.A., K.T. Selvi, M. Priya, M. Rathnakumari and P. Sureshkumar *et al.*, 2016. Investigations on dielectric and impedance properties of M-type hexaferrite. *J. Mater. Sci. Mater. Electron.*, 3: 2910-2922.
- Saiyad, A., P. Krunal, C. Daxesh and K. Tausif, 2016. Experimental study on use of M dust and coal ash with partial replacement of fine aggregates and cement in concrete. *J. Global Res. Dev. J. Eng.*, 1: 92-96.
- Subashini, A., K. Rajarajan and S. Sagadevan, 2017. Synthesis, growth, spectral, optical and thermal studies of thiourea family crystal: TTPB. *Mater. Res. Express*, Vol. 4,
- Subramani, T. and K.S. Ramesh, 2015. Experimental study on partial replacement of cement with fly ash and complete replacement of sand with M-sand. *Intl. J. Appl. Innov. Eng. Manage.*, 4: 313-322.
- Vijayamari, A., K. Sadayandi, S. Sagadevan and P. Singh, 2016. A study of optical, surface morphological and electrical properties of manganese oxide nanoparticles. *J. Mater. Sci. Mater. Electron.*, 3: 2739-2746.