

A Study on Geotechnical Vulnerability of Collector Road Damage Base on Priority Assessment and PLS-Structural Interaction

Siti Nurjanah Ahmad, Lawalenna Samang, Tri Harianto and Muralia Hustim
Department of Civil Engineering, Hasanuddin University, Makassar, Indonesia

Abstract: The annual floods that occur at the study site and the condition of the swamp pavement the cause of the damage, both minor and severe damage will greatly affect. This study aims to determine the type of damage, improve the condition of pavement and provide information on damaged roads and the geotechnical vulnerability index of road damage. The method of the Pavement Condition Index (PCI) used to evaluate the pavement condition based on the type and the level of the damage and an Analytical Hierarchy Process (AHP) process to assess roads and guide the Indonesian disaster manual to obtain an index for geotechnical road damage. To assess the relationship between factors causing damage to modeling of partial least square-structural equation modeling equations. The results showed 44.47% damage type with 83.80 M2 width and damage level of PCI 24 at very poor level occurred on Boulevard road, most difficult from road damage condition 0.204, highest score 6.86 on Mokodompit road and lowest on path of Manunggal with index value 3.00. The interrelationship of the structure-PLS provides the best parameters that directly affect the aspects used with traffic, the Tata modify functions and parameters that do not affect the aspects that create the road network. The results of this study have practical implications as a means of identifying the extent of damage to collector roads in municipalities that have swamp areas and unstable groundwater conditions.

Key words: Road damage, geotechnical vulnerability index, priority, interaction, PLS provide, Manunggal

INTRODUCTION

Road damage to many parts of Indonesia is caused by traffic characteristics, excessive vehicle wheel loads, unstable groundwater conditions, poor base soils, geometric factors and pavement road conditions, the quality and quality of inappropriate materials use specifications, economic factors land use financing and unstable road network services (Saing *et al.*, 2017; Saing *et al.*, 2018).

Flood incident that happened in Kendari city as study location became one of the causes of road damage as well as the condition of pavement base ground is a former swamp and the absence of road drainage in some roads causing road damage both minor damage and heavy damage occurred in almost all road segments and greatly disrupting the smooth flow of traffic (Anonymous, 1983a, b, 1995, 2002, 2004a, b).

The implications of geometric aspects of traffic characteristics such as traffic density on roads that are often passed by heavy vehicles can be, easily, damaged compared to roads that are only passed by light vehicles

as well as land use and financing aspects, the placement of existing highways in the shopping district will be different from those located in residential areas or educational areas in terms of road users performing activities.

In the last 3 years flood events at study sites causing severe road damage have not been addressed properly and thoroughly. The local government only does patches of local damage due to limited road maintenance fund, so, it is necessary for scientific studies to know the various types of damage what causes it assess the condition of road pavement damage and give which assessment is the priority cause of road damage and also assess how big is the index of vulnerability of geotechnical road damage that occurs, so that, the assessment of the interaction relationship of the causes of the damage can be known to be carried out efforts to overcome the maximum damage by the local government.

Based on the previous description, this study aims to determine the type of damage, assess the condition of road pavement damage and provide a priority assessment

of the most damaged road segment by assessing the vulnerability index of geotechnical road damage. Using the Pavement Condition Index (PCI) method to assess pavement conditions by type, extent and extent of damage then the Analytical Hierarchy Process (AHP) method was used to assess the priority of road segments this method was chosen because it can convert qualitative analysis into quantitative analysis. It is possible to avoid difficulties and to determine criteria for decision making.

AHP has been widely used to solve decision-making problems with complex structures more decision criteria and factors that are difficult to quantify and assist the assessment process of experts/experts and to determine an interest on the basis of several criteria (Asad *et al.*, 2013; Savitri *et al.*, 2015). Furthermore, Indonesia's disaster risk index manual is used to assess the vulnerability index of road damage geotechnical vulnerability. Specifically to assess the relationship between factors causing road damage, this case study used partial least square based structural equation modeling.

MATERIALS AND METHODS

Pavement Condition Index (PCI): An appraisal of the pavement condition index is the level of pavement surface condition that refers to the condition and damage to the pavement surface. PCI was developed to provide an index of the integrity of pavement structures and surface coating conditions by logging road damage to information about the cause of the damage and whether the damage was related to vehicle or climate loads. Periodically, surveying road pavement conditions will be useful for predicting future pavement performance or as a more detailed and focused measurement input.

The handling of road damage in Indonesia uses the road maintenance manual issued by the directorate of Bina Marga and the routine maintenance manual for the national road and its repair method, the two manuals are paired with PCI method to analyze all types of damage, cause of road damage, road damage handling process and maintenance process street. This study was conducted on 6 collector road segments in Kendari city, Southeast Sulawesi Province, namely Alala Road (2740 M), Malik Raya Road (1130 M), Boulevard Road (2470 M), Ahmad Dahlan Road (1230 M), Mokodompit Road (2200 M) and Manunggal Road (1600 MAD) but only 2 selected roads represent road

damage at the study site. In analyzing road damage by PCI method is done sequentially begins by calculating the density of the damage density can be expressed by the Eq. 1 and 2:

$$\text{Density} = \frac{Ad}{As} \times 100\% \quad (1)$$

$$\text{Density} = \frac{Ld}{As} \times 100\% \quad (2)$$

Where:

Ad = Total damage area for each level of damage (m²)

Ld = Total length of damage type for each level of damage (m²)

As = The total area of the segment unit (m²)

After the CDV is obtained, the PCI for each sample unit is calculated using the Eq. 3:

$$PCIs = 100 - CDV \quad (3)$$

The PCI value of pavement as a whole on certain road segments is:

$$PCI_f = \frac{\sum PCI(s)}{N} \quad (4)$$

Where :

PCI(s) = PCI for each segment unit

CDV = CDV of each sample unit

PCI_f = Value PCI average of all research areas

PCI_s = Value PCI for each sample unit

N = Number of sample units

Furthermore, the classification of pavement quality for the value (PCI) of each segment unit is obtained by calculating the average pavement quality pavement based on certain conditions that are very good, very good, good, medium, broken, very damaged and failed (Anonymous, 2011a, b).

Analysis herarchy process: The perception of an expert in assessing, measuring, formulating and analyzing decisions that involve the subjective factor of the assessment of such experts. AHP is used in the observation of human nature, analysis of thought and measurement that are useful for solving both qualitative and quantitative problems (Abdurrahmad *et al.*, 2016; Savitri *et al.*, 2015). In determining the priority criteria some basic criteria are needed in the weighting of options. The priority setting process of decision making in AHP (Asad *et al.*, 2016; Savitri *et al.*, 2015) includes:

- Indication of the number of alternatives to be examined
- A review of the dominance of an option against another choice occurs when the performance of an alternative is equally good for all criteria against other alternatives
- Performing the weighting, using matrix pairwise comparison
- Scoring the performance of each alternative by providing a measurable assessment of the criteria variable qualitatively or quantitatively
- Multiplying the weight of each criterion by the score/ranking of alternative performance on the criteria summing the value of each criterion, so as to obtain the total value of an alternative
- Ranking the value, so that, alternative priority is obtained

In this research a perception approach is also, conducted based on expert's opinions to evaluate the criteria of interaction with the sub criteria of road damage at the research site covering. Traffic characteristics criteria (KLL) with sub criteria include: traffic volume, vehicle speed and road capacity. Criteria of road pavement damage condition (KKpj) with sub criteria include: hole damage, grade depression damage, crack damage, wheel ramp damage and road-shoulder damage. Criteria for land use (TGL) with sub criteria include: residential area, trade and service area, education area and industrial area. The geotechnical vulnerability criteria (KG) with its sub-criteria includes: basic soil type, ground water level, pavement layer type and sub-grade road density. Road network criteria (JJ) with sub criteria include: accessibility, mobility and level of road service. The deviation from consistency is expressed by the Consistency Index (CI) of the random matrix with the scoring scale corresponding to Table 1 (Saaty, 2001).

In analyzing the weight of sub-criteria, the data were obtained from a questionnaire constructed on a Likert scale converted to pairwise comparisons as described by

Saaty (2001). The consistency value of the paired comparison of each respondent is then examined. Indicators of consistency are measured through the Consistency Index (CI) formulated as Eq. 5:

$$CI = \frac{\lambda_{max} - n}{n - 1} \quad (5)$$

Where:

λ_{max} = The maximum eigen value

n = The number of elements that are compared

The entire consistency of the assessment is then measured by a Consistency Ratio (CR) by the Eq. 6:

$$CR = \frac{CI}{RI} \quad (6)$$

Where:

RI = Random Index, the magnitude

CR = The value of consistency assessment

The consistency ratio of an acceptable respondent's assessment is a maximum of 10%. To get the consensus of all respondents who have a consistency ratio of <10% then the following geometric average is used:

$$G(x_1, \dots, x_n) = \sqrt[n]{x_1 \cdot \dots \cdot x_n} \quad (7)$$

The priority ranking is obtained by multiplying the value of the parameter (criterion) with the global weight of each sub-criterion and then adding all the results of this multiplication to get a score of each alternative path. The priority score is obtained by the equation:

$$\text{Priority score} = \sum_{i=1}^n P_i Q_i \quad (8)$$

Where:

P_i = Sub-criterion parameter value

i and Q_i = Global weight of sub-criteria i

Table 1: Matrix scale of pairwise comparison

Intensity of interest	Definition	Explanation
1	Elements that are equally important in comparison with other elements (equal importance)	Both elements contribute equally to that property
3	One element is slightly more important than the other elements (moderate more importance)	Experience states a bit in favor of one element
5	One element is clearly more important than other elements (essential strong more important)	Experience shows strongly in favor of one element
7	One element is clearly more important than the other elements (Demonstrated Importance)	Experience shows strongly in favor and dominant practice visible
9	The one element is absolutely more important than the other (absolutely more Importance)	Experience shows one element is very clear and important
2, 4, 6, 8	When in doubt between two adjacent space values (gray area)	This value is given when compromise is required

Table 2: Classification vulnerability degree (adopted from IRBI-BNPB)

Element values	Classification of vulnerability degree	Symbol/value
1, 000-3, 000	Low vulnerability degree	1
3, 100-6, 000	Moderate vulnerability degree	2
6, 100-9, 000	High vulnerability degree	3

Disaster vulnerability index: The determination of the priority scale of the geotechnical vulnerability index value of the road damage adopted the IRBI rules issued by BNPB in 2013 and 2014 on Indonesia's disaster risk vulnerability index which suggests that vulnerability is a condition or occurrence of damage within a region caused by the destruction of physical factors, infrastructure, social, economic and environments which impacts resulting in a decreased ability to deal with hazards. After analyzing the various construct parameters and indicators then proceed with a perception analysis of expert's opinions on the priority of road damage at the research site then the degree of geotechnical vulnerability is analyzed using formulas adapted from the Anonymous (2013), SIDIK (2015) methods, the IKL (Environment susceptibility index) and the regional vulnerability assessment method (Hamzah *et al.*, 2014) into following new formulas:

$$NIKGK = IBPKJ \times \frac{IKKJ}{IKDW}$$

Where:

NIKGK = Value of geotechnical vulnerability index of road damage

IBPKJ = Hazard index trigger of road damage

IKKJ = Vulnerability index of road damage

IKDW = Value of regional support capacity index

If the vulnerability index has been generated then a classification of vulnerability degree is prepared as presented in Table 2.

Partial least square-structural equation modeling:

Modeling with Structural Equation Modeling (SEM) is an integrated approach between the measurement model, the structural model and path analysis used to solve the multilevel model equations simultaneously with the dependent variable of more than one and also the reciprocal influence that cannot be solved by a linear regression equation (Ghozali, 2004). The PLS method is an alternative approach that shifts from a covarian-based SEM approach to a variance-based. SEM-based covariance generally tests the model of causality/theory while PLS aims to test the predictive relationship or influence between constructs (Asad *et al.*, 2016; Ghozali, 2004). For the analytical approach using SEM-based

PLS includes PLS-based multivariate statistical modeling with Smart PLS 2.0 M3 series software and AHP method, covering:

- Land useconstruct parameters with constructive indicators of residential, commercial, social, office/school/campus and industrial area
- Road network construct parameters with constructive indicators of accessibility, mobility and level of road service
- Road damage condition construct parameters with construct indicators of hole, grade depression, cracks, groove and shoulder drop-off
- Traffic characteristic construct parameters with construct indicator of traffic volume, vehicle speed and road capacity
- Geotechnical vulnerability construct parameters with construct indicators of basic soil type, ground water table, pavement type and sub grade road density

RESULTS AND DISCUSSION

Assessment rate of road damage: Based on road damage condition using PCI method there were 6 Road segments surveyed and selected roads with the highest level of damage, i.e., Mokodompit and Manunggal road segment and average income of PCI on both roads compared to Table 3. Type of damage that occurred on the road Mokodompit damage pothole with damage area of 39.625 m² with the percentage of damage 34.419%, alligator cracking cracks with damage area of 14.875 m² with the percentage of damage 12.921%, patches with an area of damage of 8.688 m² with damage percentage 7547%, roadside crack with damage area equal to 11.000 m² with percentage of damage 9.555%, weathering and loose grane with damage area 3.75 m² with damage percentage 3.257%, city-box crack with damage area 13.75 m² with damage percentage 11.943% and damage of rutting with damage area equal to 23.438 m² with damage percentage 20.359%. But the most dominant type of damage is hole damage (pothole).

As for the road of Manunggal there is damage to the type of hole (pothole) with damage area of 39.625 m² with damage percentage 34.419%, crack lengthwise or transverse with damage area equal to 39.625 m² with damage percentage 34.419%, alligator cracking 14.875 m² with damage percentage 12.921%, road shoulder damage with damage area equal to 39.625 m² with percentage of damage 34.419%, patch with damage area 8.688 m² with

Table 3: Result of calculation of road damage condition by PCI method

Stations (m)	Mokodompit Road		Manunggal Road	
	Value PCI	Road condition	Value PCI	Road condition
0+000-0+100	38	Poor	48	Fair
0+100-0+200	90	Perfect	68	good
0+200-0+300	25	Poor	40	Fair
0+300-0+400	42	Fair	32	Poor
0+400-0+500	81	Very good	56	Good
0+500-0+600	38	Poor	41	Poor
0+600-0+700	68	Good	36	Poor
0+700-0+800	88	Perfect	35	Poor
0+800-0+900	65	Good	78	Verygood
0+900-1+000	20	Very poor	65	Good
1+000-1+100	78	Very good	36	Poor
1+100-1+200	66	Good	31	Poor
1+200-1+300	35	Poor	69	Good
1+300-1+400	51	fair	57	Good
1+400-1+500	40	Fair	70	Good
1+500-1+600	80	Very good	24	Poor
1+600-1+700	30	Poor		
1+700-1+800	34	Poor		
1+800-1+900	68	Good		
1+900-2+000	34	Poor		
2+000-2+100	47	Fair		
2+100-2+200	51	Fair		
3+200-2+300	40	Fair		
Amount	1209		786	

Table .4: The extent and types of damage

Type of damage	Mokodompit Road		Manunggal Road	
	Area (m ²)	Kerusakan (%)	Area (m ²)	Kerusakan (%)
Hole (pothole)	39.625	34.419	13.87	19.403
Cracks extend and transverse	-	-	15.00	20.984
Alligator cracking	14.875	12.921	14.55	20.354
Path/descent of road shoulder	-	-	5.75	8.044
Patch	8.688	7.547	7.313	10.230
Roadside/side fracture	11.000	9.555	3.25	4.547
Weathering and granular discharges	3.75	3.257	-	-
Crack the boxes	13.75	11.943	-	-
Rutting	23.438	20.359	9.75	13.640
Basin	-	-	2.00	2.798
Amount	115.126	100	71.483	100

damage percentage 7.547%, crack edge/side of road with damage area equal to 11.000 m² with percentage 9.555% damage, rutting with damage area equal to 23.438 m² with damage percentage 20.359% and damage of basin with damage area equal to 39.625m² with damage percentage 34.419% but the most dominant type of damage is damage crack length/transverse (Table 4).

On both sides of the road that suffered the most severe damage and need serious attention, so that, damage does not increase if not quickly repaired. Damage to both roads causing inconvenience for motorists who use the road, either damaged holes light, medium or heavy hole. This occurs as a result of the development of other types of damage that are not immediately addressed, the effects of weather (especially, rain/flood) and vehicle traffic that exceeds the implied load that accelerates the formation of holes (Fig. 1).

AHP-based priority level: Modeling the priority rank of geotechnical vulnerability to road damage was done with Analytic Hierarchy Process (AHP) approach using pairwise comparison function on criteria as the result is shown in Table 5 (Saaty, 2001). Then the eigen vector line value on the previous matrix and the result are as follows:

$$\text{Number of line A} = 1.000 \times 1.230 \times 1.130 \times 0.961 \times 1.150 = 5.471$$

Determining the amount of wi:

$$w_i \text{ line A} = \sqrt[5]{5.471} = 1.462$$

$$\text{Eigen vector (X}_i\text{)} = \frac{w_i}{\sum w_i} = \frac{1.462}{4.3314} 0.331$$

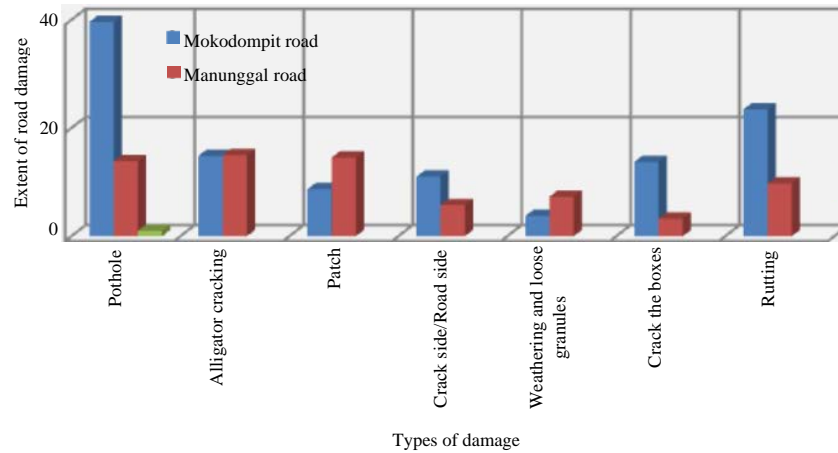


Fig. 1: Area and type of road damage

Table 5: Initial matrix of criteria rating

Criteria	KLL	KKPJ	TGL	KG	JJ
KLL	1.000	1.230	1.130	0.961	1.150
KKPJ	0.813	1.000	1.091	1.892	0.823
TGL	0.884	0.917	1.000	1.054	0.952
KG	1.017	0.529	0.952	1.000	1.232
JJ	0.869	1.219	1.052	0.813	1.000
Σ	4.583	4.895	5.225	5.720	5.157

Table 6: Eigen vector value for scale of determining criteria scale

Criteria	KLL	KKPJ	TGL	KG	JJ	Total	Wi	E-vector
KLL	1.000	1.230	1.130	0.961	1.150	5.471	1.405	0.2028
KKPJ	0.813	1.000	1.091	1.892	0.823	5.619	1.412	0.2039
TGL	0.884	0.917	1.000	1.054	0.952	4.807	1.369	0.1976
KG	1.017	0.529	0.952	1.000	1.232	4.730	1.364	0.1970
JJ	0.869	1.219	1.052	0.813	1.000	4.953	1.377	0.1988
Σ	4.583	4.895	5.225	5.720	5.157	25.580	6.928	1.0000

The maximum eigen value is obtained from the initial matrix multiplied by evector of each matrix and the result is shown Table 6:

$$\text{Consistency Index (CI)} = \frac{(\lambda_{\max} - n)}{(n-1)} = \frac{(5.112-5)}{(5-1)} = 0.028$$

$$\text{Consistency Ratio} = (CR) = \frac{(CI)}{(RI)} = \frac{(0.028)}{(1.12)} = 0.025 < 0.1 \text{ consistency}$$

Criteria	KKL	KKPJ	TGL	KG	JJ
KKL	1.00	1.230	1.130	0.961	1.150
KKPJ	0.813	1.000	1.091	1.892	0.823
TGL	0.884	0.917	1.000	1.054	0.952
KG	1.017	0.529	0.952	1.000	1.232
JJ	0.869	1.219	1.052	0.813	1.000

$$\begin{array}{c}
 \text{E - vector} \\
 0.2028 \\
 0.2039 \\
 0.1976 \\
 0.1970 \\
 0.1988
 \end{array}
 =
 \begin{array}{c}
 \lambda_{\max} \\
 1.095 \\
 1.121 \\
 0.961 \\
 0.944 \\
 0.992
 \end{array}$$

Total = 5.112

Consistency Ratio (CR) value is <0.1 or equal to 10% according to the consistency requirement <0.1 or 10%. To calculate the element weights, it was obtained from the e-Vector values presented in Table 7. From Table 7 it can be seen that respondent's assessment of some criteria indicates that the criteria of traffic characteristics have an influence of importance level with weight of 0.2028 the road pavement damage condition criterion has an influence of importance level with the weight of 0.2039 land use criteria have an influence of importance level with the weight of 0.1076 the criterion of geotechnical vulnerability has an influence of importance

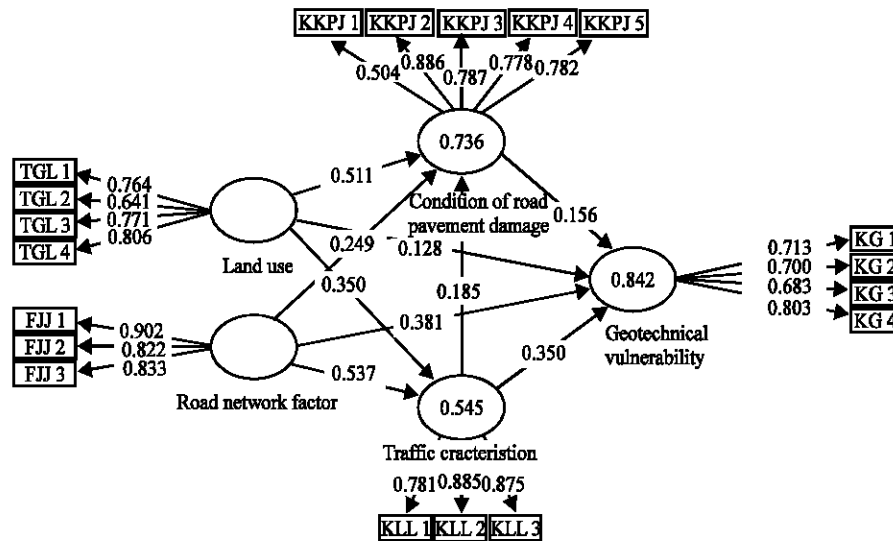


Fig. 2: Path diagram full model

level with the weight of 0.1970 and the criteria of road network factors have an influence of importance level with the weight of 0.1988. From the various rankings of the sixth street score it can be seen that the score scores have sufficient ability to rank priorities for geotechnical damage in Fig. 2.

Geotechnical vulnerability index of road damage (NIGKJ): The new formula for the geotechnical vulnerability index of road damage (NIGKJ) is then applied to the six roads one of which is as follows. Analysis on Boulevard road segment where:

$$NIKGKJ = 8.065 \times \left(\frac{3.512}{7.673} \right) = 3.6914$$

In the compilation, the classification of vulnerability degree will consist of low degree of vulnerability, moderate vulnerability and high degree of vulnerability and is calculated according to the classification of vulnerability levels adopted from IRBI-BNPB (Anonymous, 2012, 2013). From the comparison of the scores of the six road segments it is seen that the priority score has sufficient accuracy in determining the priority ranking of geotechnical vulnerability of road damage as described in Table 8.

The classification of vulnerability degree in Table 11 shows that the highest vulnerability index value is 6.7 on HEA Mokodompit road segment which is included in the element value of 6.10-9.00 meaning that the condition of

Table 7: Weight criteria (objective)

Sub criteria	Weight	Percentage
Traffic characteristics	0.2028	20.28
Condition of road pavement damage	0.2039	20.39
Land use	0.1976	19.76
Geotechnical vulnerability	0.1970	19.70
Road network	0.1988	19.88
Total	1.0000	100.00

Table 8: Classification of geotechnical vulnerability degree of road damage

Road segment	Score/value of vulnerability index	Classification of vulnerability degree
Mokodompit road	6.87	High
Malik Raya road	4.73	Moderate
Boulevard road	3.70	Moderate
Ir.H. Alala road	3.61	Moderate
Ahmad Dahlan road	3.60	Moderate
Manunggal road	3.00	Low

damage or vulnerability degree is high. On Malik Raya Road, Boulevard Road, Alala Road and Ahmad Dahlan Roads, the classification of vulnerability degree is moderate while Manunggal road has index vulnerability value of 2.00 which is then included in the classification of low vulnerability level.

Estimation of inner model parameters: Inner model or structural model in PLS analysis describes the strength of relationships between factors (latent variables) (Abdillah and Hartono, 2015; Ghozali, 2004). The interaction relationships between factors in the structural model and the overall indicator shown in the path diagram full model as illustrated in Fig. 1 can be used to measure each construct. The value of the loading factor in Fig. 2 shows all the indicator of the model execution

Table 9: Parameter of convergent validity test

Variables	AVE	Remark
Land use (TGL)	0.560	Valid
Road network factors (JJ)	0.727	Valid
Traffic characteristics (KLL)	0.719	Valid
Condition of road pavement damage (KRPJ)	0.554	Valid

Table 10: Varian extraction values of construct average

Variables	AVE	AVE root
Land use (TGL)	0.560	0.748
Road network factors (JJ)	0.727	0.853
Traffic characteristics (KLL)	0.719	0.848

result is above 0.50. This value represents adequate convergence validity, meaning that one latent variable is able to explain more than half the variants of the indicators in the average (Latan and Ghazali, 2012; Abdillah and Hartono, 2015). It is revealed that road pavement conditions significantly influence the vehicle speed, pavement conditions influence the traffic characteristics. The condition of the pavement is inversely proportional to the speed of the vehicle where the more severe the damage of road pavement the more decreased the vehicle speed.

Convergent validity test : The convergent validity of the measurement model using reflective indicator was assessed by loading factor >0.7 , AVE >0.5 and communality >0.5 values. From Table 9 it appears that this model passed a convergence validity test that indicates that the indicator of the same construct has a high correlation (Latan and Ghazali, 2012; Abdillah and Hartono, 2015).

Test of discriminant validity: The measurement of discriminant validity is closely related to the principle that the correlation value of the indicator to its construct must be greater than the correlation value between the indicator and the other construct as shown in Table 9. In Table 10 shows that the correlation value of the indicator to the variable is greater than the value of correlation to other constructs. Fulfillment of discriminant validity test can also be demonstrated by comparing the square root of Average Variance Extracted (vAVE) value of each construct with the construct correlation value with other constructs.

Hypothesis testing (t-test): Is done by using bootstrapping resampling method based on how significant the coefficient of structural model path is the level of significance used in this research is (α) = 5% or 0.05 with $t = 1.96$. The principles for decision making

(hypothesis) If the probability value $p > 0.05$ or the t-statistic value $< t$ -table value then H_0 is accepted and H_1 is rejected. If the value of probability $p < 0.05$ or t-statistic value $> t$ -table value then H_0 is rejected and H_1 accepted and obtained partial influence between variables hypothesized in this research which can be justified in Table 11.

Table 11 shows that the hypothesis T3 (1.600), T5 (1.330), T6 (1.560) and T8 (1.209) have p-values $> \text{sig. } \alpha$ (0.05), so that, the two alternative Hypothesis H_1 is rejected and H_0 is accepted. It is understood that land use aspect is a moderating variable which can strengthen or weaken the condition of pavement damage to geotechnical vulnerability, for example, hole, grade depression, cracks, wheel trails and road shoulder drop off which may cause damage to the vehicle, accidents for people and vehicles passing and road pavement damage conditions also may influence the speed of the vehicle which implies on the high willingness of people not to pass such broken roads.

Relationship between construct variables: This research analyzed the power of influence between latent variables involving many variables. The level of closeness/strength of the functional relationship was tested by evaluating the direct, indirect and total influence of a construct variable on the other construct variables and the indicator whose results are.

Factors that have a direct influence: Are land use on geotechnical vulnerability road network factors to geotechnical vulnerability condition of road pavement damage variable to geotechnical vulnerability and traffic characteristics to geotechnical vulnerability.

Factors that have an indirect influence include: Land use on geotechnical vulnerability through condition of road damage and traffic characteristics variables, road network factors to geotechnical vulnerability through condition of road damage variable and traffic characteristics and traffic characteristics to geotechnical vulnerability through road damage condition variables. Structural modeling results provide answers to research hypothesis regarding interactions of traffic characteristic, road pavement damage conditions, road network and land use factors and their implications for geotechnical vulnerability to road damage simultaneously.

Table 11: Hypothesis test results

Code	Hypothesis	t-statistic	p-values	Remark
T1	Road network factor with traffic characteristics	5.217	0.000	H ₁ rejected
T2	Road network factor with condition of road pavement damage	3.620	0.000	H ₁ rejected
T3	Road network factor with geotechnical vulnerability	1.600	0.110	H ₁ rejected
T4	Traffic characteristics with condition of road pavement damage	3.157	0.002	H ₁ accepted
T5	Traffic characteristics with geotechnical vulnerability	1.330	0.184	H ₁ accepted
T6	Condition of road pavement damage with geotechnical vulnerability	1.560	0.119	H ₁ rejected
T7	Land use with traffic characteristics	3.317	0.001	H ₁ accepted
T8	Land use with geotechnical vulnerability	1.209	0.227	H ₁ accepted
T9	Land use with condition of road pavement damage	4.375	0.000	H ₁ accepted

CONCLUSION

In this study in obtained the following conclusions the dominant type of damage is a 44.47% groove type with a width of 83.80 m² and the damage value of PCI 24 at a very bad level occurs on the Boulevard Road. First most important priority is the Mocodompit Road of 4.171 because on this road there is no drainage on the left and right of the Road and the ground is essentially a former swamp. The highest index vulnerability score of 6.87 is on the Mokodompit road segment which is included in the element value of 6.10-9.00 and the Manunggal Road with a vulnerability index value of 3.00 including the low vulnerability classification. The interrelationship of PLS structure interactions resulted in the assessment between the parameters directly affecting the aspects of land use with traffic characteristics, land use with road pavement damage and the effecting parameters did not affect the aspect of pavement damage conditions with the road network.

REFERENCES

- Abdillah, W. and J. Hartono, 2015. [Partial Least Square (PLS) Alternative Structural Equation Modeling (SEM) in Business Research]. Penerbit Andi, Yogyakarta, Indonesia, ISBN:9789792952162, Pages: 272 (In Indonesian).
- Anonymous, 1983. Road maintenance manual No.03/MN/B/1983. Directorate General of Highways, Jakarta, Indonesia.
- Anonymous, 1983. Routine maintenance manual for national and provincial roads volume II title of standard improvement method No. 002/T/Bt/1995. Directorate General of Highways, Jakarta, Indonesia.
- Anonymous, 1995. Technical guidance survey of road engineering planning No. 013/T/Bt/1995. Directorate General of Highways, Jakarta, Indonesia.
- Anonymous, 2002. Survey of paved road conditions in urban areas, urban governance and rural governance department of residential and infrastructure. Directorate of Technical Affairs, Jakarta, Indonesia.
- Anonymous, 2004. Law of the republic of Indonesia No. 38 of 2004 on Roads. Department of General Workers, Directorate General of Highways, Jakarta, Indonesia.
- Anonymous, 2004. Survey guidelines of traffic enumerator Pd.T-19-2004.B. Department of General Workers, Directorate General of Highways, Jakarta, Indonesia.
- Anonymous, 2011. Guidance on road condition survey No. 001-04/P/BM/2011. Ministry of Public Works, Jakarta, Indonesia.
- Anonymous, 2011. Road survey guideline No. 001-04/P/BM/2011. Ministry of Public Works, Jakarta, Indonesia.
- Anonymous, 2012. General guidelines for disaster risk assessment. National Disaster Management Agency (BNBP), Jakarta, Indonesia.
- Anonymous, 2013. Indonesia's Disaster Risk Index (IRBI). National Agency for Disaster Management (BNBP), Jakarta, Indonesia.
- Asad, A.M., S. Lawalenna, S.A. Adisasmita and M.I. Ramli, 2013. A comprehensive framework for evaluating the feasibility of upgrading road category based on analytic hierarchy process: Case study in South Sulawesi Province, Indonesia. Proc. East Asia Soc. Transp. Stud., Vol. 9,
- Ghozali, I., 2004. Structural Equation Modeling: An Alternative Method with Partial Least Square (PLS). 4th Edn., Diponegoro University, Semarang, Indonesia.
- Hamzah, S., S.A. Adisasmita, T. Harianto and M.S. Pallu, 2014. Private involvement in sustainable management of Indonesian port: Need and strategy with PPP scheme. Procedia Environ. Sci., 20: 187-196.
- Latan, H. and I. Gozali, 2012. Partial Least Square, Concepts, Techniques and Applications Smart PLS 2.0 M3. Diponegoro University, Semarang, Indonesia.

- Saaty, T.L., 2001. The Analyze Hierarchy Process, Planning, Priority, Setting, Resource Allocation. McGraw-Hill Education, New York, USA.,.
- Saing, Z., L. Samang, T. Harianto and J. Palanduk, 2018. Bearing capacity characteristic of subgrade layer quicklime treated laterite soil. Proceedings of the 1st International MATEC Web Symposium on Transportation Studies for Developing Countries (ISTSDC 2017) Vol. 181, November 4, 2018, EDP Sciences, Les Ulis, France, pp: 1-7.
- Saing, Z., L. Samang, T. Harianto and J. Patanduk, 2017. Study on characteristic of laterite soil with lime stabilization as a road foundation. Intl. J. Appli. Eng. Res., 12: 4687-4693.
- Savitri, D.A.W., D.P. Wedagama and I.G.P. Suparsa, 2015. [Analysis of priority determination of handling roads in Denpasar city based on Analytic Hierarchy Process (AHP) method with a combination of Fuzzy Analytic Hierarchy Process (FAHP) and topsis methods (In Indonesian)]. J. Spektran, Vol. 3,